


## Datasheet

Next-generation technology and smart innovations for a more connected, keyless building experience.

**SALTO**  
inspired access

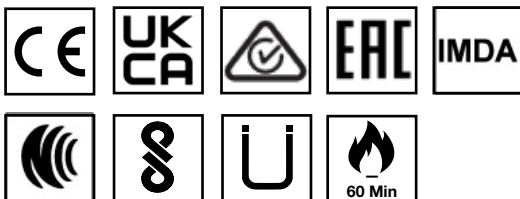

Publications of SALTO SYSTEMS S.L. are protected by copyright and all rights are reserved. SALTO SYSTEMS publications may not be reproduced in any form or by any means without written permission from the copyright owner.

### XS4 Mini Metal Scandinavian Sx350x

Technical specifications:

XS4 Mini wire-free electronic door lock blends attractive design and sophistication with strength and smart technology for your building. Easy to install design makes the XS4 Mini a simple way for professionals to upgrade and replace mechanical-key-operated locks with the latest in electronic access control.

**saltosystems**  
**.com**

**TECHNICAL DATA:**

|                                     |                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------|
| Reader dimensions (H x W x D):      | 128,0 x 61,5 x 23,5 mm                                                           |
| Weight                              | 0,5 kg                                                                           |
| Handle rotation:                    | Max. 45°                                                                         |
| Door thicknesses:                   | 35 mm - 100 mm                                                                   |
| Square spindles:                    | 8 mm                                                                             |
| Power source:                       | 3 AAA batteries (LR03 1,5V)                                                      |
| Number of openings:                 | 40,000                                                                           |
| Maximum events on lock audit        | 2 250 (SVN standalone mode)<br>1 850 (SVN BLUEnet mode)<br>1 450 (SALTO KS mode) |
| Temperature (without condensation): | +5 °C / +60 °C.                                                                  |
| IP class:                           | Not suitable for outdoor use.<br>Up to max. 80% humidity,<br>non-condensing.     |
| Certifications:                     | CE, UKCA, ACMA,<br>EAC, IMDA, NCC, BIS,<br>Ú-Certificate,<br>EN 1634-1 EI 60     |

**OPENING MODES:**


|                            |   |
|----------------------------|---|
| Standard:                  | • |
| Office mode:               | • |
| Timed office:              | • |
| Automatic opening:         | • |
| Automatic opening + office | • |
| Toggle:                    | • |
| Timed Toggle:              | • |
| Amok mode:                 | — |
| Exit leaves open mode:     | • |

**CREDENTIAL TECHNOLOGIES:**


|                                          |   |
|------------------------------------------|---|
| JustIN Mobile Credentials <sup>1</sup> : | • |
| NXP MIFARE <sup>®2</sup> :               | • |

<sup>1</sup> Bluetooth Digital Key and Near Field Communication (NFC) capability.  
<sup>2</sup> MIFARE<sup>®</sup> DESFire<sup>®</sup> EV1/EV2/ EV3, MIFARE<sup>®</sup> Plus, MIFARE<sup>®</sup> Ultralight C, MIFARE<sup>®</sup> Classic.

**TECHNICAL DRAWING:**

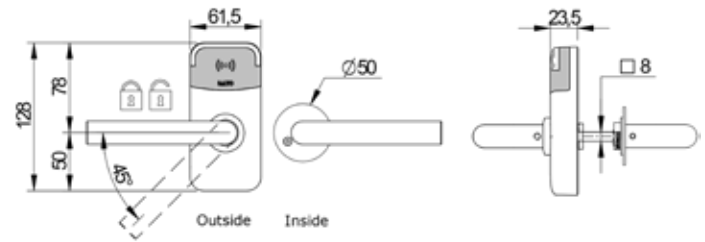

**HANDING REVERSIBLE**



**SALTO PLATFORMS:**

|                  | <b>S</b> <sup>1</sup> | <b>KS</b> <sup>2</sup> | <b>H</b> <sup>3</sup> |
|------------------|-----------------------|------------------------|-----------------------|
| SVN data-on-card | •                     | —                      | •                     |
| JustIN Mobile    | •                     | •                      | •                     |
| BLUEnet Wireless | • <sup>4</sup>        | •                      | •                     |
| Apple Wallet     | —                     | —                      | •                     |

<sup>1</sup> SALTO Space. On-premise access control platform  
<sup>2</sup> SALTO KS. Cloud-based access control platform  
<sup>3</sup> SALTO Homelok. Cloud-based access control platform  
<sup>4</sup> RFnet Wireless versions are Not Compatible

**OPTIONS:**

**Reader finish:**

|        |   |
|--------|---|
| Black: | • |
| White: | • |

**Finish:**

|                                        |   |
|----------------------------------------|---|
| IM Satin Stainless - BHMA630 US32D     | • |
| IP Polished Stainless - BHMA629 US32   | — |
| PM PVD satin brass type - BHMA732 US4  | • |
| PP PVD bright brass type - BHMA729 US3 | — |
| NE Black chromium - BHMA685            | — |
| DB PVD Dark Bronze - US10B             | — |
| BC BioCote anti-microbial              | • |


**Handles**

|                    |                  |
|--------------------|------------------|
| Compatible handles | E, L, S, T, U, W |
|--------------------|------------------|

**MODELS:**


**Sx350:**

2 handles any type.

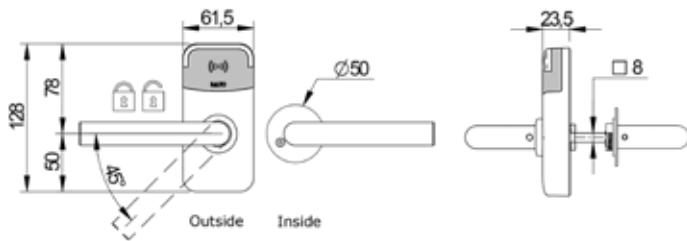


**Sx351:**

2 handles any type.  
Inside thumbturn.

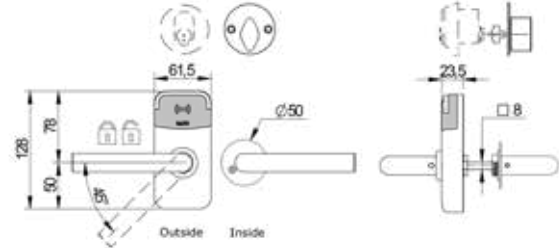


**Sx354:**

2 handles any type.  
Inside plate.  
• For mechanical emergency override.

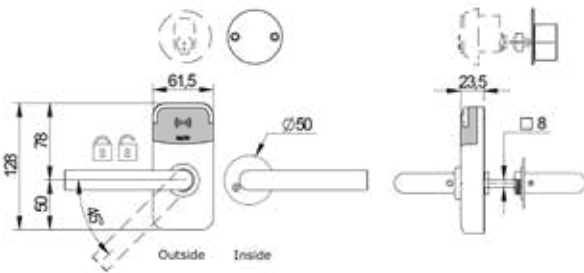


**Sx360:**

2 handles any type.  
Outside built in cover plate and inside plate.

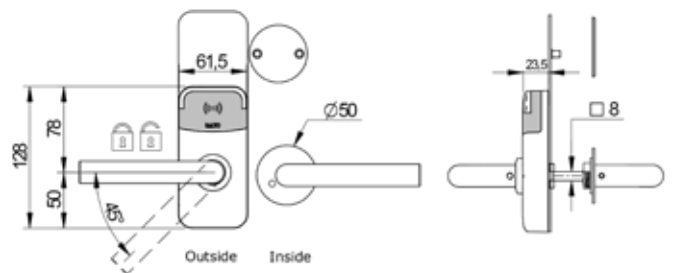


**Sx361:**

2 handles any type.  
Outside built in cover plate and inside thumbturn.

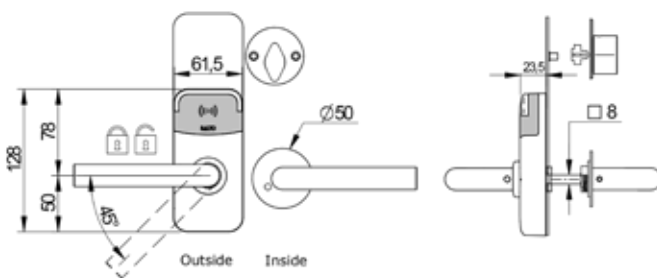


**Sx370:**

2 handles any type.  
Outside and inside built in cover plate.

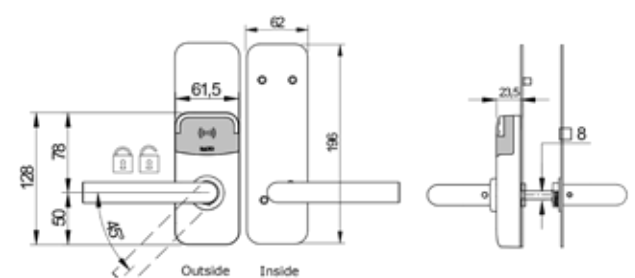

**Sx371:**

2 handles any type.  
Outside and inside built in cover plate and inside thumbturn.

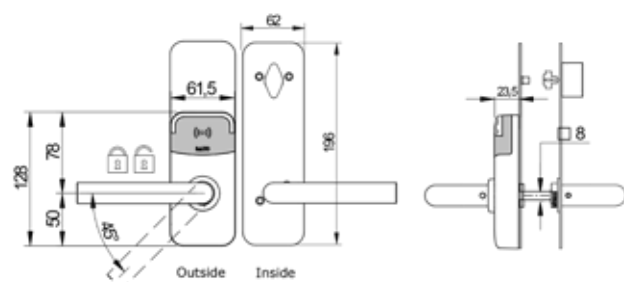



---

## **SALTO Systems.**

Get in touch with our team.

Give us a brief summary of your needs, your next project and we'll get back to you.

Spain, UK, France, Germany, Switzerland, The Netherlands, Belgium, Poland, Slovakia, Slovenia, Czech Republic, Denmark, Norway, Sweden, Finland, Italy, Portugal, US (NYC - Atlanta - LV), Canada, Mexico, Costa Rica, Colombia, Puerto Rico, Chile, UAE, India, South Africa, Singapore, China, Hong Kong, Korea, Vietnam, Australia, New Zealand.

**saltosystems  
.com**