DATASHEET

XS4 Mini by SALTO

Stylish design is a SALTO trademark and with the XS4 Mini, we raise the bar on this already high standard thanks to its small, discreet size combined with a modern, clean LED aesthetic.

The Mini's smart compactness simplifies installation. Besides, it maintains the fire rating of the door as no additional drilling of the door is required.

www.saltosystems.com

TECHNICAL SPECIFICATIONS: XS4 MINI Sx15x









TECHNICAL DATA:

| Reader dimensions (H x W x D): | 127,0 x 58,5 x 22,5 mm |
|-------------------------------------|--|
| Weight | 0,5 kg |
| Handle rotation: | Max. 45° |
| Door thicknesses: | 35 mm - 100 mm |
| Square spindles: | 8 mm |
| Power source: | 3 AAA batteries (LR03 1,5V) |
| Number of openings: | 40,000 |
| Maximum events on lock audit | 2 250 (SVN standalone mode) 1 850 (SVN BLUEnet mode) 1 450 (SALTO KS mode) |
| Temperature (without condensation): | +5 °C / +60 °C. |
| IP class: | Not suitable for outdoor use. Up to max. 80% humidity, non-condensing. |
| Certifications: | CE |

TECHNICAL DRAWING:

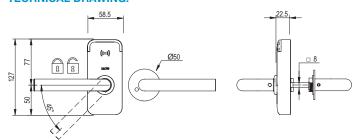

HANDING REVERSIBLE



ID TECHNOLOGIES:

| MIFARE / DESFire:* | • |
|--------------------|---|
| BLE Smart: | • |
| NFC: | • |
| Legic:** | _ |
| HID iClass®: | • |
| Picopass: | _ |
| i-Button: | _ |

^{*} MIFARE® (DESFire EV2, Plus, Ultralight C, Classic).

TECHNOLOGY PLATFORMS:

SALTO SPACE:

| Smile - Selfprogrammable | _ | |
|--------------------------|---|--|
| ROM: | • | |
| SVN data-on-card: | • | |
| SALTO RFnet: | _ | |
| SALTO BLUEnet: | • | |
| SALLIS: | _ | |
| SALTO KS: | | |
| JALIU NJ. | | |

SALTO KS:

OPENING MODES:

| Standard: | • |
|----------------------------|---|
| Office mode: | • |
| Timed office: | • |
| Automatic opening: | • |
| Automatic opening + office | • |
| Toggle: | • |
| Timed Toggle: | • |
| Amok mode: | _ |
| Exit leaves open mode: | • |
| Pin code / Keypad: | _ |

OPTIONS:

Reader colour:

| Black: | • |
|--------|---|
| White: | • |

Faceplate finsih:

| IM Satin stainless steel: | • |
|----------------------------|---|
| IP Bright stainless steel: | _ |
| IA Antique brass: | _ |
| PP PVD bright brass type: | _ |
| PM PVD satin brass type: | • |
| NE Black chromium: | _ |
| BC BioCote anti-microbial: | • |
| | |

Handles

| Compatible handles | U, L, W, E, T, S |
|--------------------|------------------|
|--------------------|------------------|




^{**} Legic Prime and Legic Advant

MODELS:

Sx150:

2 handles any type.

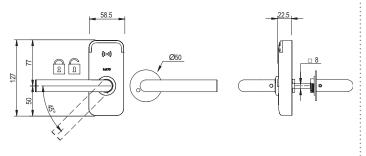


Sx154:

2 handles any type.

Inside plate.


• For mechanical emergency override.

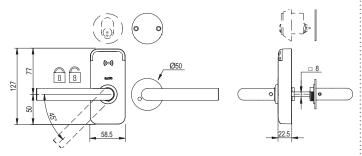

Sx161:

2 handles any type.


Outside built in cover plate and inside thumbturn.

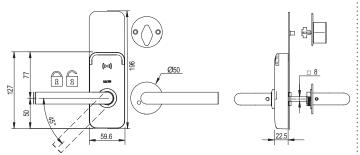

Sx171:


2 handles any type.

Outside and inside built in cover plate and inside thumbturn.

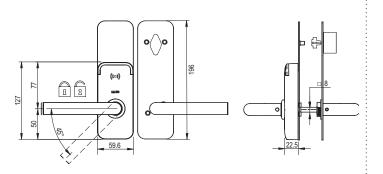

Sx151:


2 handles any type. Inside thumbturn.

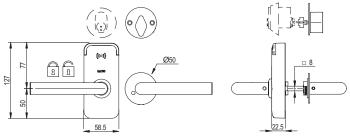

Sx160:

2 handles any type.

Outside built in cover plate and inside plate.

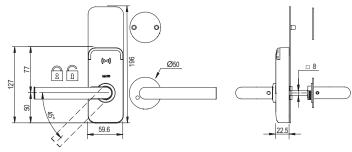

Sx170:

2 handles any type. Outside and inside built in cover plate.

